

# Telalarm Wall-Mount/Compact Wall Mount Tower



The Telalarm wall mount tower series was developed for use on college campuses and hospital sites. It has become one of our most popular towers to date at many universities across the United States. The tower can be powder coated per the customer's request (extra charge may apply for non-standard colors) as well as custom logo for your business site.

255 GLIDER CIRCLE  
CORONA, CA 92880  
PHONE : (951) 371-1730  
FAX: (951) 371-2592

 **TRIGON**  
ELECTRONICS, INC.

- 1/4" POWDER COATED steel
- 10-number rollover auto-dialing Compact Wall Mount Shown Below
- L.E.D. Phone Panel Light
- (1) form C dry contact relay for controlling optional internal camera
- ADA compliant "call progress" lamp
- Large EMERGENCY decal
- Combination blue light / strobe
- Wall Mount 56" high
- Compact Wall Mount 38" high



Telalarm Wall-Mount / Compact Wall Mount Tower - Emergency Towers

# Telalarm HF-2 Wall Mount & Compact Wall Mount Towers

## Specifications

**Design** - Handsfree speaker telephone. Single button operation.

**Capacity** - Up to 10 numbers, each up to 16 digits in length.

**Response Assurance** - Unit cannot be disabled by pressing call button after Emergency Mode operation sequence is started. Only remote attendant can terminate call.

**Site ID** - Programmable 4 digit code.

**Programming** - Remote via touch-tone telephone.

**Power** - 100VA 1 phase 60hz, transformer included.

**Output Ratings** -

Power Relays: 5 AMPS @ 12VDC or 1 AMP @ 110VAC

**Output Duration** - Duration of call.

**Inputs** - Push-for-help button.

**Telephone Line** - Standard touch-tone or rotary. Dedicated or extension line.

**Mounting** - Surface.

**Construction** -

- Noncorroding 1/4 inch powder coated steel tower.
- HF-2 has #316 stainless steel faceplate.
- Tough carbon fiber speaker.
- Unidirectional microphone in an acoustical chamber.
- Braille ADA compliant plate.

**Operating Temperature** - -5° F to +120° F

## Mounting

## Options

**High Visibility** - Large red button and heavy duty switch

**Camera** - Black & White, Color or Wide Angle, low light.

**Two Button** - Allows one button for emergency calls and a second button for information calls.

**Available Cellular Wireless** - Allows tower to be placed in areas where traditional telephone lines cannot be used.

**Voice Location Identifier module** - Allows an audible confirmation of the units location.

## Accessories

**Line Filter** - Suppresses RFI/EMI from input power line.

**DECODER III** - Desktop device decodes and displays Site ID information.

**Consolidator** - Call routing and switching system. Allows multiple HF-2 units to operate with few, or with no, outside lines.


## Fiber Optic Compatible

International Fiber Systems model #s:

TT 2010, TR 2010, TT 2010WDM, TR 2010WDM,

TT 2030, TR 2030, TT 2030WDM, TR 2030WDM

## Dimensions/ hookup

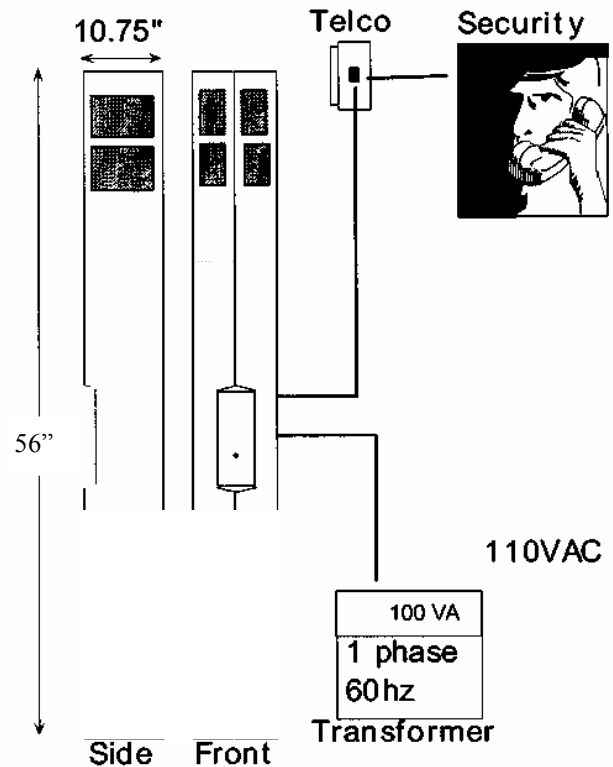

**TRIGON**  
ELECTRONICS, INC.